

# PaveSafe Pavers


## Outdoor & Equine Surfacing

### PRODUCT ATTRIBUTES

- **24 or 44.5mm Vulcanized Composition Rubber (VCR) Paver**  
Provides excellent durability and slip resistance



Made from Vulcanized Composition Rubber (VCR) PaveSafe Pavers are easy to install and provide superior coefficient of friction in both wet and dry conditions. This unique paver visual enhances the appearance of any surface and makes them ideal for outdoor walking paths and terraces.

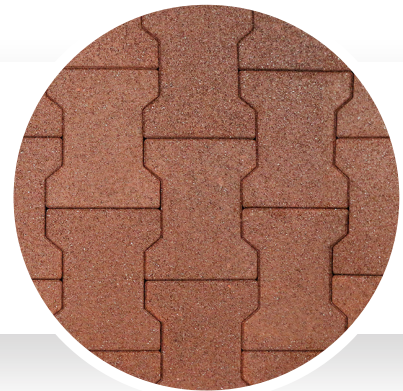

### APPLICATIONS

- Equine
- Outdoor
- Paths
- Terraces

### BENEFITS

- Excellent shock absorption and protection
- Outstanding performance and longevity
- Slip-resistant when wet
- Low cost and environmentally-friendly
- Easy to install and maintain
- Can be adhered or loose laid depending on substrate

### NOMINAL DIMENSIONS

Talk to your local sales rep to determine availability, pricing, minimums, and lead times.



- 24mm [.94"] x 7.75" (19.7cm) x 6.25" (15.88cm)
- 44.5mm (1.69") x 7.75" (19.7cm) x 6.25" (15.88cm)

\*Not available in Gray\*

Note: 3.42 pavers per sq. ft.

NRG<sup>®</sup>



**Force Reduction: 50.67%**  
Absorption of impact energy



**Energy Restitution: 51.60%**  
Useful return of impact energy

*Typical Deltec Field Tester Results for 44.5mm option*



# PaveSafe Pavers

## COLOR SWATCHES




Terra Cotta Red



Solid Black




Slate Grey



Forest Green


## ACCESSORIES



### **PaveSafe Reducer (use with 44.5mm):**

12" (30.48cm) x 39" (.99m)


Thickness: 1 11/16" (43mm)



### **PaveSafe Beveled Edge Reducer (use with 24mm):**

2.5" (6.35cm) x 39" (.99m)

Thickness: 15/16" (24mm)



### **PaveSafe Border Edge (use with 44.5mm):**

10" (25.4cm) x 39" (.99m)

Thickness: 2" (50.8mm)