

# RageTurf UltraTile

## Functional Training Turf Tiles


### PRODUCT ATTRIBUTES

- **12mm Pile Height Polyethylene RageTurf Surface Layer**  
Provides excellent durability and slip resistance
- **1" Molded VCR UltraTile Base Layer\***  
Upcycled VCR molded base layer provides extreme shock absorption and subrate protection.

\*Installed using Ecore's Quad Blok installation system. Quad Bloks allow the flooring system to float and the tiles to be installed in conjunction with Performance UltraTiles.



RageTurf UltraTile features a dense, textured polyethylene surface layer that is factory fusion bonded to a molded composition rubber base. While too abrasive to fall or dive on, this consistent and tight surface is ideal for all footwork drills and can be used with Performance UltraTile. This 24-by-24 modular turf tile offers enhanced shock absorption against impact in moderate to extreme weight drop applications.

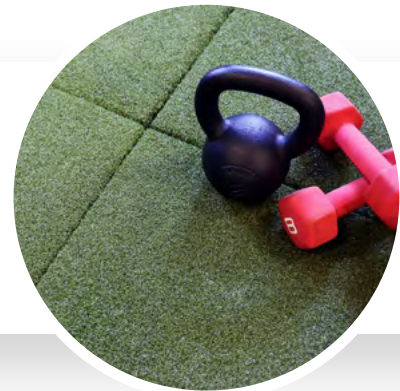

### APPLICATIONS

- Functional Training
- Free Weights
- Therapy / Rehab
- Outdoor (must be fully adhered)

### BENEFITS

- Durable
- Sustainable
- Ease of maintenance
- Slip-resistant
- Easy installation with Quad Blok installation system

### NOMINAL DIMENSIONS

Available as a standard in 24" x 24" tiles. Talk to your local sales rep to determine availability, pricing, minimums, and lead times.



37.4mm x 24" (0.61m) x 24" (0.61m)



**Quad Blok:** 1/2" H x 4 3/4" x 4 3/4"

Adhesive = 1 28oz Tube / 40 Quad Bloks

NRG<sup>®</sup>





**Force Reduction: 60.3%**  
Absorption of impact energy



**Energy Restitution: 36.9%**  
Useful return of impact energy

*Typical Deltec Field Tester Results*

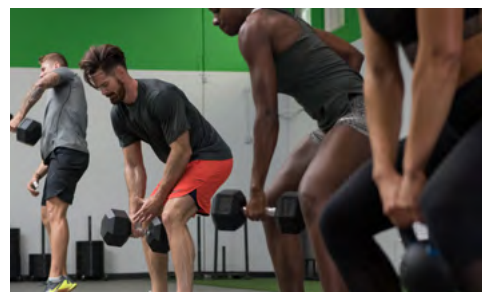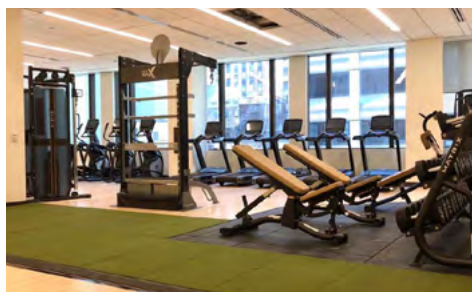

# RageTurf UltraTile

## COLOR SWATCHES



Green

## TECHNICAL DETAILS

Performance Criteria	Test Standard	Typical Results
Force Reduction	Deltec Field Tester	60.3%
Energy Restitution	Deltec Field Tester	36.9%
Vertical Deformation	Deltec Field Tester	7.2mm
G-Max	Clegg	52
Tufted Pile Height		.47"
Flammability - Pill Test	ASTM D2859	Pass
Coefficient of Friction	ASTM D2047	>0.8
Impact Insulation Class*	ASTM E492	74
Delta IIC*	ASTM E2179	36

*\*Tested on a 6" concrete slab with no ceiling.*