Bounce 2

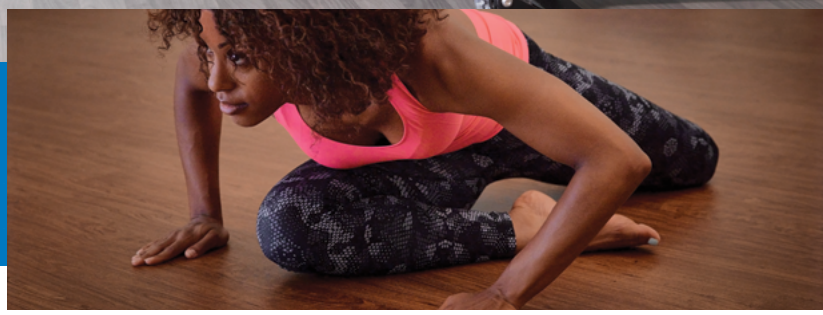

Bounce 2 features a synthetic wood-grain surface and is fusion bonded to a 5mm base layer with 2.5 inch board widths. This six-foot-wide floor offers a seamless, easy-to-maintain surface that is ideal for group fitness and functional training, while being durable enough for cardio equipment and light weights.

MARKETS

- Fitness
- Sports
- Student Rec

BENEFITS

- Durable
- Ergonomic
- Quiet underfoot
- Ease of maintenance
- Indoor only

APPLICATIONS

- Common Areas
- Cardio
- Group Exercise / Dance
- Yoga
- Spin
- Selectorized Strength
- Multipurpose / Courts
- Locker Rooms / Restrooms
- Therapy / Rehab
- Living Spaces
- K-12 / Higher Education
- Retail
- Corporate / Offices

empowered by ecore

PRODUCT INFORMATION

Nominal Dimensions:

Available as a standard in rolls. Talk to your local agent to determine availability, pricing, minimums, and lead times.

7mm (2mm + 5mm) x 72” (1.83m) x 30 LF (9.14m)
Weld rod required

Color Options:

Click here to view colors

THE NRG FACTOR

NRG =

11.9% Force Reduction
Absorption of impact energy

68.4% Energy Restitution
Useful return of impact energy

Safety | Ergonomics | Acoustics

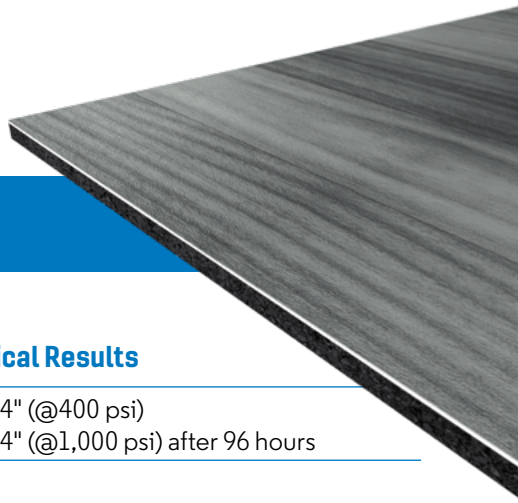

TECHNICAL DETAILS

Performance Criteria	Test Standard	Typical Results
Static Load Limit	ASTM F970 ASTM F970 modified	0.004" (@400 psi) 0.004" (@1,000 psi) after 96 hours
Coefficient of Friction	ASTM D2047	> 0.6
FloorScore	CA 01350	Certified
Reaction to Fire	ASTM E648	Class 1
Abrasion Resistance	ASTM D3389	Group T / Type 1
Dynamic Rolling Load	ASTM F2753	No Change, No Damage (@ 10,000 cycles)
Standard Vertical Deformation	ASTM 2772	0.72mm (Class B)
Surface Effect Slip Resistance	ASTM 2772	100 BPV (Pass)
Ball Rebound	ASTM 2772	95.5%
Force Reduction	ASTM 2772	12.5% (Class 1)
Impact Insulation Class (IIC)*	ASTM E492	52
Delta IIC*	ASTM E2179	23

*Tested on a 6” concrete slab with no ceiling.

BUILT ON itsTRU TECHNOLOGY

empowered by ecore