


# Modzilla ShockPad

A floating & interlocking solution

## PRODUCT ATTRIBUTES

### • Floating VCR Interlocking tile ShockPad

Provides extreme force reduction and energy restitution and does not need to be adhered to the substrate. Available in 2 thicknesses.

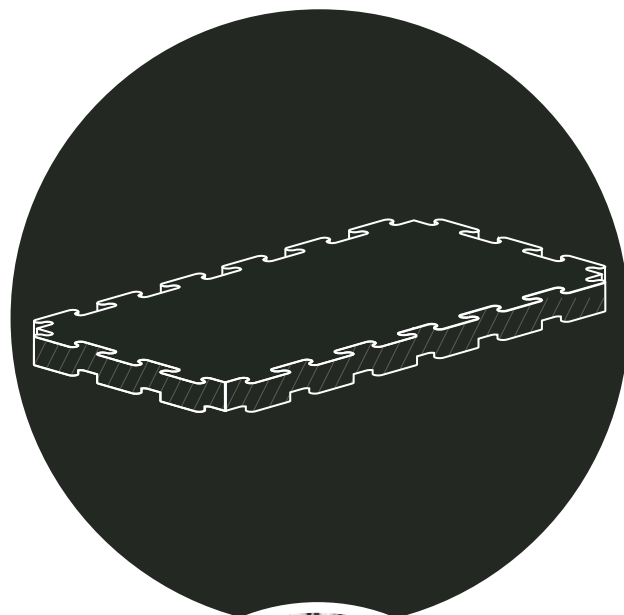

Available in 32mm vulcanized composition rubber interlocking tiles, Modzilla ShockPad provides the ultimate amount of shock absorption. Modzilla ShockPad interlocking tiles do not need to be adhered to the substrate, allowing you to create a floating floor system that is easy to install. These interlocking tiles are designed to be used as a field united ShockPad with Performance Beast and Performance Beast Plus and are not designed to be a finished floor.

## APPLICATIONS

- Functional Training
- Free Weights
- Olympic Style Lifting

## BENEFITS

- Ergonomic
- Reduces force from impacts
- Durable
- Does not need to be adhered to the substrate


## NOMINAL DIMENSIONS

Talk to your local sales rep to determine availability, pricing, minimums, and lead times.

 **MOD15**  
15mm x 24" x 48"

 **MOD32**  
32mm x 24" x 48"

- Performance Beast Plus is approved over Mod15 and Mod32
- 8mm Basic Fit is approved over Mod15 only

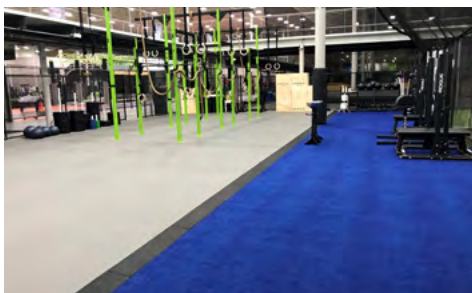

# Modzilla ShockPad

## TECHNICAL DETAILS

Performance Criteria	Test Standard	Typical Results
Density	ASTM D297	44.6 lb./cu. ft. min
Tensile Strength	ASTM D412, Die C	63 psi min
Compression/Recovery @100 psi	ASTM F36	Compression nominal 36%   Recovery 92% min
Flexibility	ASTM F137	1-2 Factor
Force Reduction	Deltec	Mod15: 36.64%   Mod32: 57.6%
Energy Restitution	Deltec	Mod15: 46.0%   Mod32: 48.9%